

Mounting instructions

1094-B

6-8 m

CE

IEC EN60598

outdoor

85V-305V

50Hz 60Hz

⏏

□

IP66

IK08

Max. 40°C
Min. -40°C

Mounting instructions

1094-B













6-8 m

CE

IEC EN60598

outdoor

85V-305V

50Hz 60Hz

⏏

□


IP66

IK08



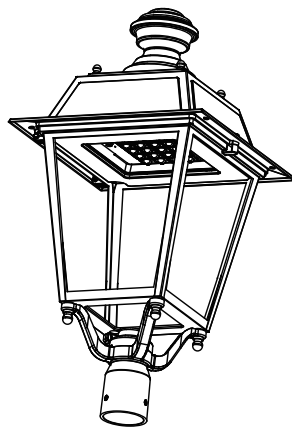Max. 40°C
Min. -40°C





**85V-
305V**

50Hz
60Hz



IP66

IK08



Max.
40°C
Min.
-40°C



Dimensions in mm

t mm	$\varnothing$ 55-60	mm	Max:90
--	---------------------	--	--------


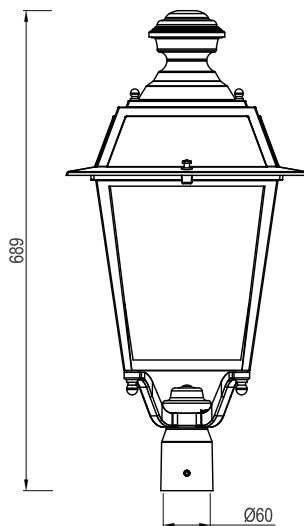
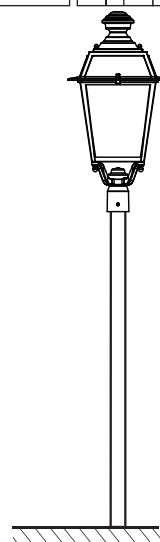

Top view dimensions: 346 mm (width), 346 mm (height)

Front view dimensions: 689 mm (height), $\varnothing$ 60 (base diameter)



Side view dimensions: 3/4 m (height)

SCx=0.34 m²

SCx=0.047 m²





$$SC_x = 0.34 \text{ m}^2$$
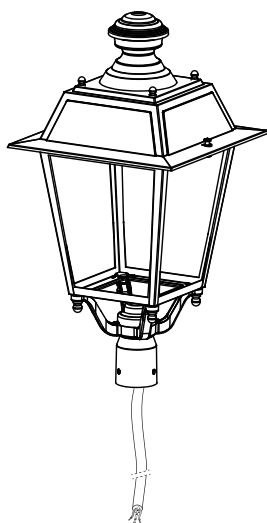
$$SC_x = 0.047 \text{ m}^2$$


1




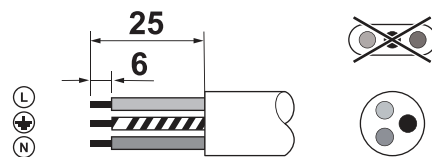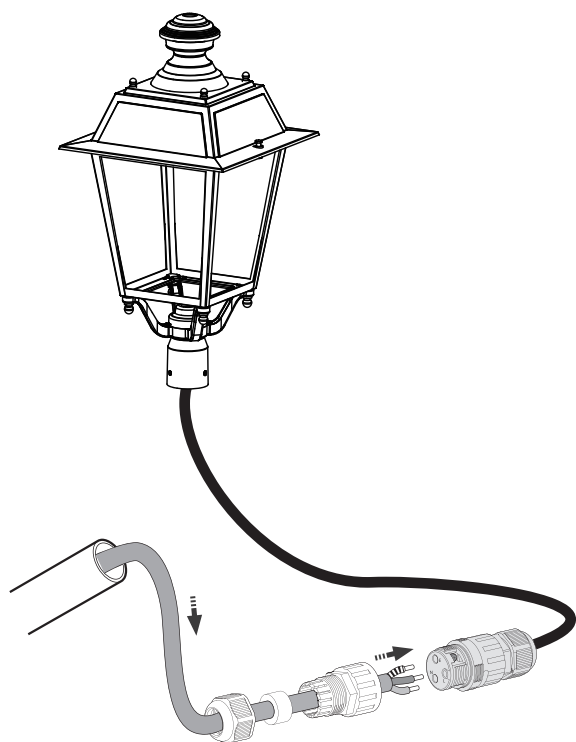2


IP68 rated connector not included



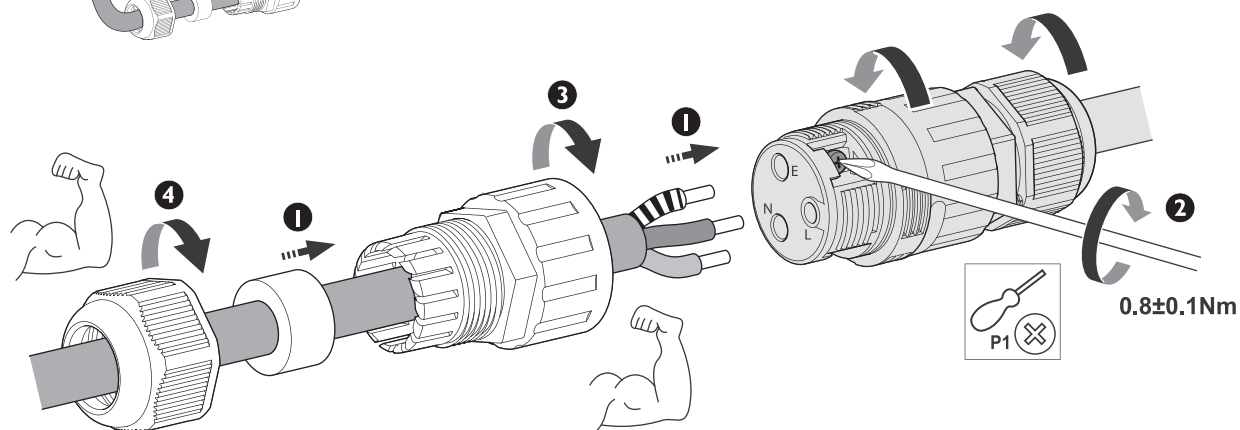
Cable: 60245IEC57
 Min. $3 \times 1.0 \text{ mm}^2$
 Max. $3 \times 2.5 \text{ mm}^2$
 $\Phi 6.5 - \Phi 7.5 \text{ mm}$




OFF



3

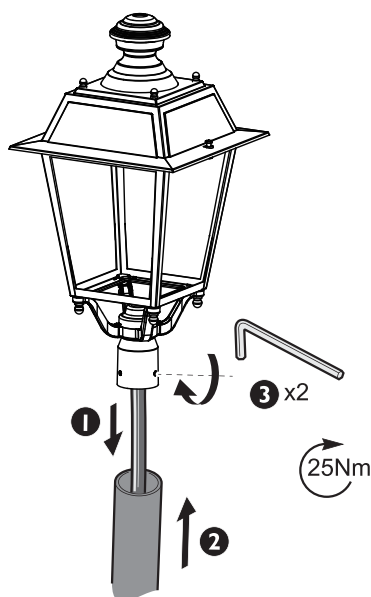

ON



4

